



## WAFERGARD® II F-6 IN-LINE GAS FILTERS

*Superior particulate filtration for ultrapure gas system filtration*

### Overview

Wafergard® II F-6 in-line gas filters are the filters of choice for ultrapure gas system filtration. These filters have excellent compatibility with all classes of semiconductor gases and offer high-efficiency filtration with optimal flow differential performance.

### Applications

- Bulkheads
- Facility chases
- Valve manifold boxes

### Features and Benefits

- Greater than 99.999999% removal of all particles larger than 0.003 µm diameter
- 316L stainless steel shell with 0.25 µm Ra (10 µin Ra) electropolished interior finish
- Cleanroom manufactured, welded and tested
- Low pressure drop reduces risk of low vapor pressure gas condensation
- Cleanroom packaged by vacuum baking and double bagging for superior cleanliness




### Specifications


Materials:	Filter element	Hydrophobic Teflon® PTFE membrane supported by molded Halar® ECTFE stacked disc supports with a direct housing seal
	Housing	Electropolished 316L stainless steel housing
Downstream cleanliness:	Less than 0.03 particles/liter (<1 particle/ft <sup>3</sup> ) greater than 0.01 µm*	
Removal rating:	≥0.003 µm	
Surface finish interior:	≤10 µin Ra	
Helium leak rating:	Qualified	2 × 10 <sup>-10</sup> cc/min.
	Tested	1 × 10 <sup>-9</sup> cc/min.
Operating conditions:	Maximum inlet pressure	40 bar (600 PSIG) at 23°C
	Maximum forward differential pressure	4 bar (60 PSID) at 23°C
	Maximum reverse differential pressure	0.7 bar (10 PSID) at 23°C
	Maximum operating temperature	120°C (248°F)
Particle retention:	Greater than 99.999999% (9 LRV) removal of all particles @ 300 SLPM (referenced at the most penetrating particle size)	
Flow rating:	Refer to flow curve	

\*Verified at 30 SLPM

## Performance Data

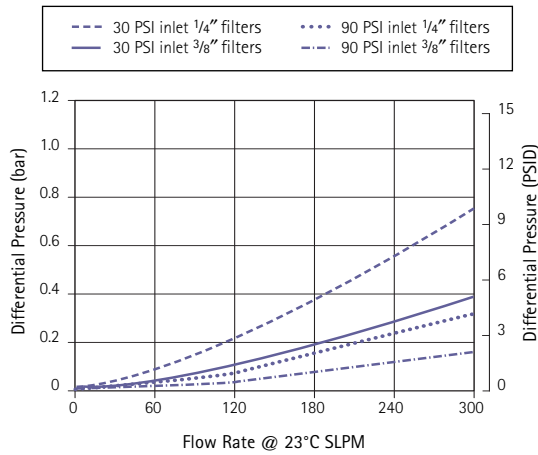

## Dimensions

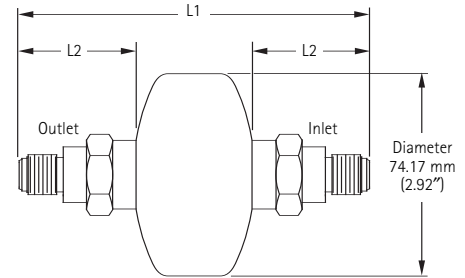

## Ordering Information

Part Number	Fitting Options	L1 Overall Length	L2 Fitting to Housing Length
WG2F 06 WR1	1/4" gasket seal (compatible with VCR® fitting) male inlet/outlet	127.0 mm (5.00")	42.4 mm (1.67")
WG2F 06 WS1	1/4" compression seal (compatible with Swagelok® fitting)	112.8 mm (4.44")	353 mm (1.39")
WG2F 36 WR1	3/8" gasket seal (compatible with VCR® fitting) male inlet/outlet	127.0 mm (5.00")	42.4 mm (1.67")
WG2F 36 WS1	3/8" compression seal (Swagelok® compatible)	117.9 mm (4.64")	3.79 mm (1.49")

## For More Information

Please call your Regional Customer Service Center today to learn what Entegris can do for you. Visit [www.entegris.com](http://www.entegris.com) and select "Regional Customer Service Centers" for the center nearest you.

## Terms and Conditions of Sale

All purchases are subject to Entegris' "Terms and Conditions of Sale." To view and print this information, visit Entegris' website at [www.entegris.com](http://www.entegris.com) and select the Legal Notices link from the footer found on the home page.

Entegris® and Wafergard® are registered trademarks of Entegris, Inc.  
VCR® is a registered trademark of Cajon Company.  
Teflon® is a registered trademark of E. I. du Pont de Nemours and Company.  
Halar® is a registered trademark of Ausimont USA, Inc.  
Swagelok® is a registered trademark of Crawford Fitting Company.

### ENTEGRIS, INC.

Corporate Headquarters / 3500 Lyman Boulevard / Chaska, Minnesota 55318 USA  
Customer Service Tel. 952-556-4181 / Customer Service Fax 952-556-8022  
[www.entegris.com](http://www.entegris.com)